

# Studio RPU

## Studio Remote Patcher Utility



### ORDERING GUIDE


CXRPU -

Finish  
WH White  
BK Black

### SPECIFICATIONS

|                        |                                                |
|------------------------|------------------------------------------------|
| Dimensions (L x W x H) | 6.0" x 2.2" x 1.1" /<br>15.2cm x 5.6cm x 2.8cm |
| Weight                 | 0.42lb / 0.19kg                                |
| DC Voltage             | USB Type-C Port (5V/1A Power)                  |
| IP Rating              | IP-X4                                          |
| DMX Output Speeds      | 20 - 44 Hz (User Selectable)                   |
| DMX / RDM Port         | TRRS Port (XLR-5 via adapter)                  |
| Mount                  | 1/4" - 20 / Magnets (Wall Mount) /<br>Lanyard  |
| Updates                | via Wi-Fi / USB-C                              |


### MECHANICAL FIGURE

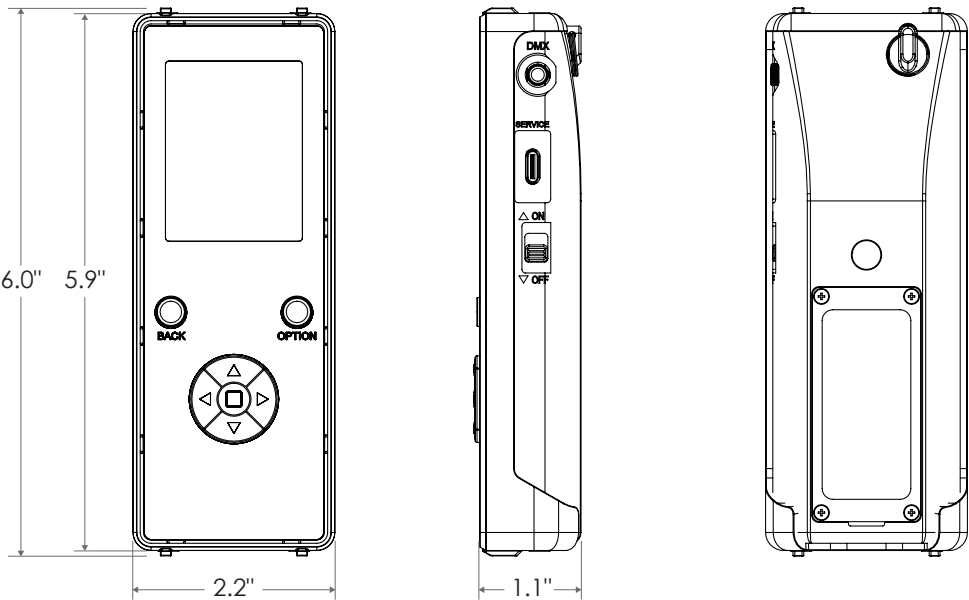

## INSTALLATION INFO


### Power

Requires a hardline power connection provide via USB Type-C.

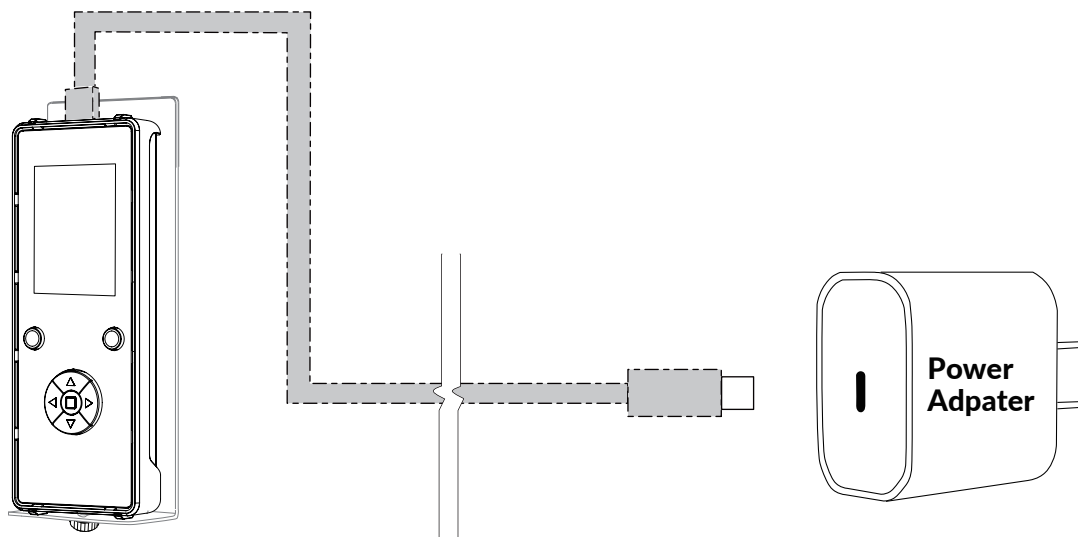

### Battery Installation

Unscrew the 4x screws (M2 Phillips screw) and remove the cover, insert 2x AAA batteries, then reverse the steps to secure it. The studio RPU can now operate for up to 30 minutes on mobile use.

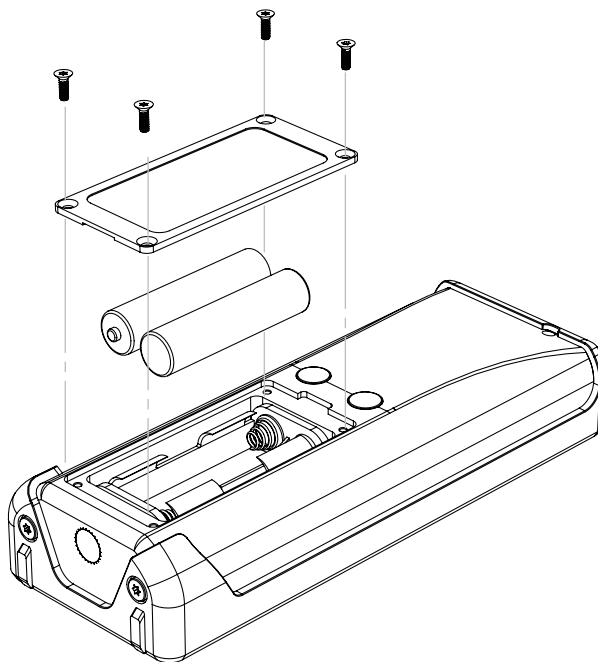

\*Note: Battery packs are for short term mobile use only. Do not leave batteries installed permanently.