


FEATURES


- 1500W-2000W tungsten equivalent, 340W draw
- Full Dimming
- IP-24 (Water-Resistant)
- Extended Color Temperature Range (2800-6500K)
- High CRI ≥ 93
- Weighs Only 12.8 lbs
- LCD Display & DMX-Ready
- Flicker Free at any Frame Rate
- Virtually Heat Free and Cool to Touch
- Custom Travel Case Available



FULL SPECTRUM

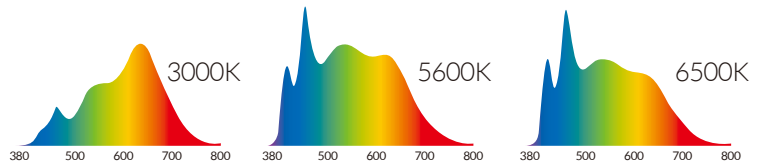

TUNABLE CCT & HUE

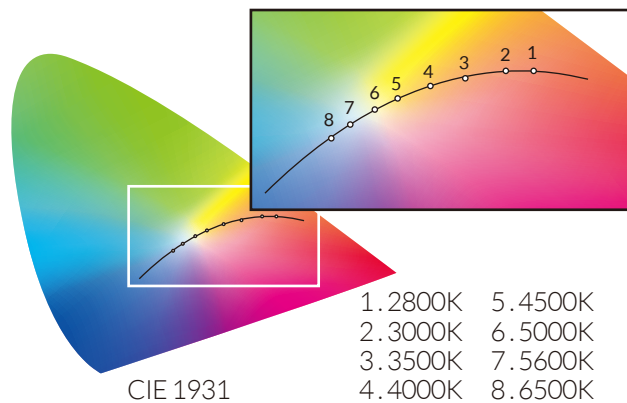

- 1. 2800K
- 2. 3000K
- 3. 3500K
- 4. 4000K
- 5. 4500K
- 6. 5000K
- 7. 5600K
- 8. 6500K



EXCELLENT COLOR RENDERING

CCT	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	CRI _{Ra} *	CRI _{Ext} *	TLCI
3000K	97	99	92	96	99	98	98	96	92	92	94	88	97	94	96	97	95	98
5600K	96	99	98	93	95	97	95	91	73	93	92	84	97	99	93	95	93	97
6500K	95	98	97	91	94	97	93	89	66	93	90	83	95	99	92	94	91	95

Values in this table are typical.

*CRI_{Ra} is the averaged result of R1 to R8; CRI_{Ext} is the averaged value of R1 to R15.

PHOTOMETRIC DATA

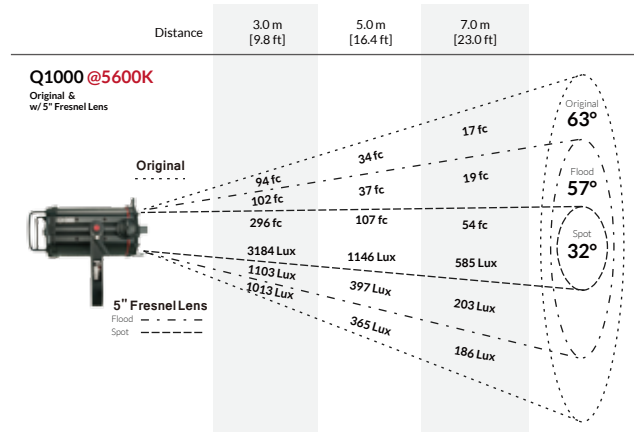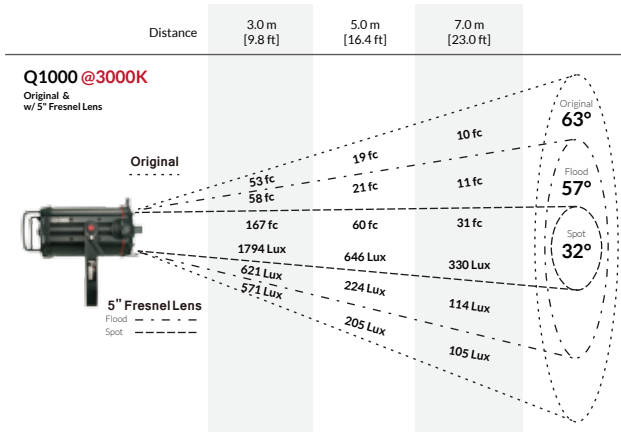

SPECIFICATIONS

Size	L 12.8" x W 12.75" x H 15.7" (with Yoke) / L 12.8" x W 9" x H 6.75" (without Yoke)
Weight (Includes Yoke)	17.9 lbs / 8.1kg (Body: 12.8 lbs / 5.8kg ,Ballast: 5.1 lbs / 2.3 kg)
LED	Dense Matrix LED
Thermal Design	Advanced Vapor Cooling System
Beam Angle	63° (Without Accessories) / 32°-57° (With 5" Fresnel Lens)
CCT Range	Continuous from 2800K to 6500K
Hue Control	plus/minus .25 Magenta/Green
Dimming	100 - 0.2%
CRI	≥93
Power Consumption	340W Max AC / 300W Max DC / Comparable in Output to 1300W Tungsten
Power Input	AC Power: 100-240 VAC, 50~60Hz, Max 340W AC / DC Power 48-54V, Max 300W
Input Port	Detachable Power Con Cable
DMX Control	2 XLR ports and 2 RJ45 ports (512 Addresses)
Temperature Range	32 - 104°F / 0 - 40° C (over temperature protection)

OPTIONAL ACCESSORIES & KITS



8" Fresnel Lens



Para Softbox Kit



PAR Reflector

Included in the K154 Kit

