

P3S Spot Light (Clamp)

90W LED/ 20°



- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

ORDERING GUIDE

FLXP3S - - - CLP - PSV -

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

CLP Clamp Mount

Power Supply & Control

PSV Power Supply


Plug/Connection

US US 120V
EU EU 220V


SPECIFICATIONS

| | |
|------------------------------------|---|
| Beam Angle | 20° |
| CRI / TLCI | 95/90 typical (in CCT Mode of 2800K-6500K) |
| Dimming | 100% - 0% flicker free |
| Power Draw | 90W max |
| AC Input | 100 - 240V AC, 50 - 60Hz |
| Remote Control | DMX 512 |
| Cooling | Fan Cooled |
| Acoustic Noise | 23 dBA |
| Operating Temp. | 32 - 104°F (0 - 40°C) |
| Weight (Fixture + Power Supply) | 3.6lb / 1.7kg |


MECHANICAL FIGURES

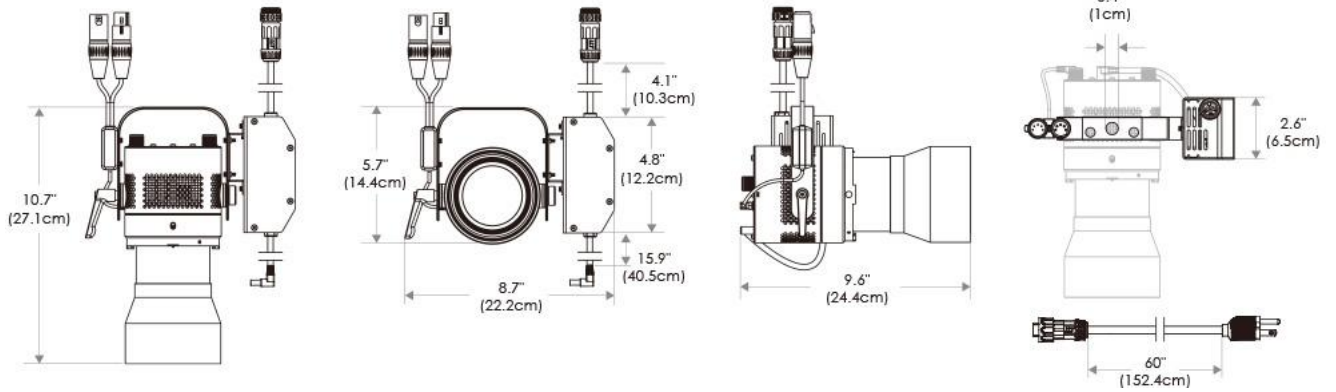

PHOTOMETRIC DATA



| Distance | | 3' (~0.9 m) | 10' (~3.0 m) | 15' (~4.6 m) |
|---------------|-----|-------------------|-------------------|-------------------|
| @3200K | fc | 1267 | 106 | 53 |
| | lux | 13638 | 1141 | 571 |
| @5600K | fc | 1309 | 110 | 55 |
| | lux | 14090 | 1185 | 593 |
| Beam Diameter | | Ø 1.0' (~0.3m) | Ø 3.5' (~1.1m) | Ø 5.3' (~1.6m) |

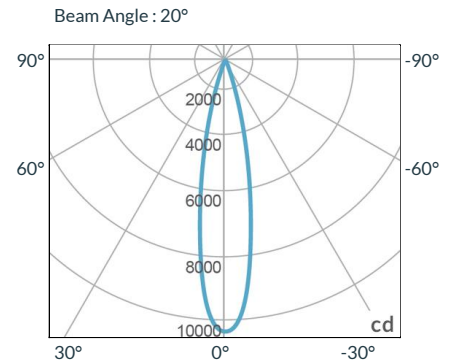

MODE DESCRIPTION

| Mode Description | Available Modes |
|------------------|---|
| - CLR | All Modes (8 bit and 16 bit) |
| - EZ | All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K) |
| - RGB | EZ RGB (8 bit) |
| - CCT | EZ CCT (8 bit) |
| - 3200 | EZ 3200K (8 bit) |
| - 5600 | EZ 5600K (8 bit) |

See Downloads portion of webpage for full DMX profiles