



With the **T360**, Fiilex brings its advanced LED technology to the world of track lighting. No other LED track fixture comes close to matching the T360's combination of a compact form-factor with intense, broadcast-quality illumination. Unobtrusive and powerful, the T360 can turn any space into a studio.

The T360 is compatible with a wide range of light-modifying accessories. Smaller magnetic attachments include diffusers, fresnels, honeycombs, and gel holders. The safety-minded design of the T-Series includes integrated lockdown screws for available accessories.



Each fixture is also DMX512 compatible, allowing users to operate them remotely via the Fiilex DMX Controller or any standard DMX board.



FEATURES

- Designed for DMX track (3-CH: intensity, CCT, hue)
- Dims to 0% without flicker or color shift
- 2800-6500K continuous CCT tuning
- High CRI values at every color temperature
- ±0.25 green/magenta adjustment
- Precise color calibration for consistent quality
- 300W tungsten output (85W draw)
- Less than 8" of clearance required
- Lightweight (less than 3 lbs)
- Integrated power supply
- Optional light modifiers available


BEAM PROFILE

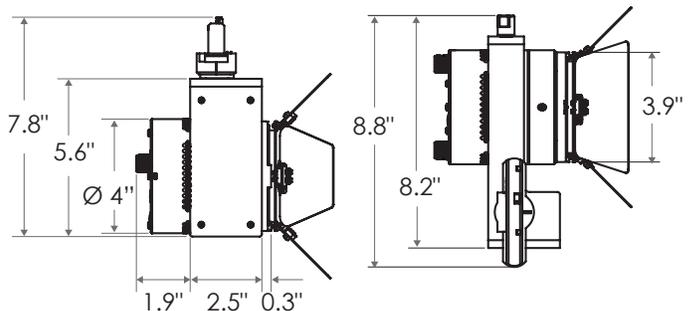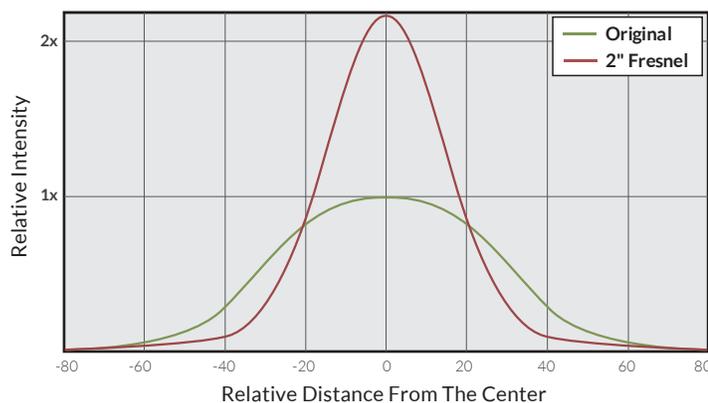

SPECIFICATIONS

Beam Angle	65° (33° with 2" fresnel)
CCT Range	2800 - 6500K continuous tuning
CRI	95 typical
TLCI	90 typical
Hue	±0.25 green/magenta
Dimming	100% - 0% flicker free
Light Engine	Dense Matrix LED
Power Draw	85W max
AC Input	120V AC, 60Hz
DMX Control	3-CH (intensity, CCT, hue)
Display Type	OLED
Weight	2.82lbs / 1.28kg
Size (L x W x H)	8.8" x 4.7" x 7.8" / 22.4cm x 11.9cm x 19.8cm
Mount	Locking DMX track attachment
Thermal Design	Advanced vapor cooling system (fan cooled)
Acoustic Noise	22.7dB (professional recording studio level)
Operating Temperature	32° - 104°F / 0° - 40°C

PHOTOMETRIC DATA

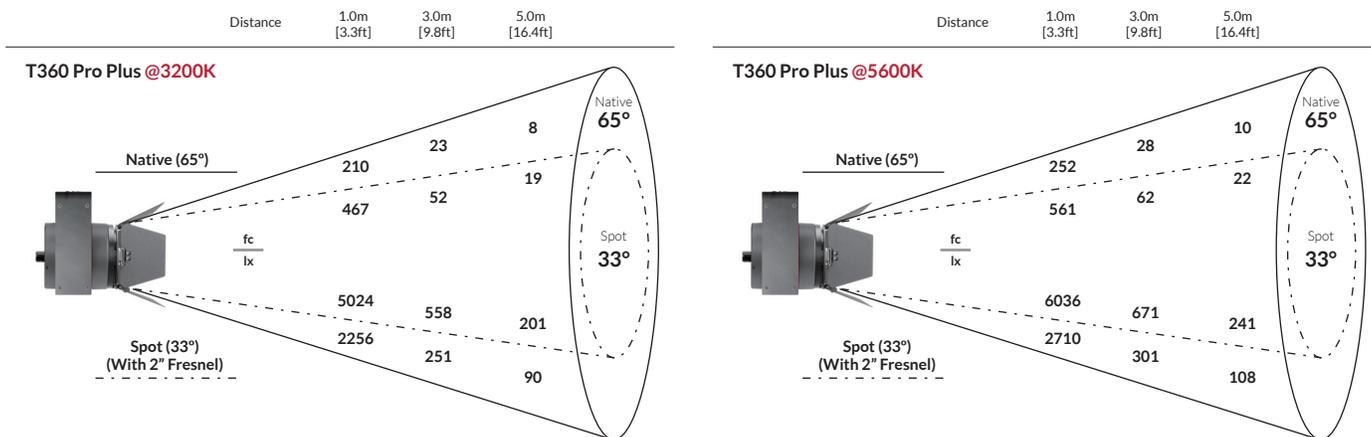

OPTIONAL ACCESSORIES



2" Fresnel



Snoot



Dome Diffuser



Honeycomb-N



Honeycomb-W



Louver



Gel Holder



Mini Softbox Kit