

## REDEFINE SPECULAR


Let Fiilex V70 LED Viewing Lamp transform your desk into a color viewing workstation. At a fraction of the size and cost of traditional viewing stations, the V70 offers the same clean D50 and D65 light used by professionals to evaluate and compare colors in prints, paints, and fabrics. Its high CRI guarantees that your colors will look beautiful, and four color temperature settings (3000K, 4000K, 5000K, 6500K, accurate to +/-100K) let you assess your work in a variety of lighting conditions. The V70 includes a low profile Dome Diffuser and is compatible with many other Fiilex accessories, giving you even greater versatility in image viewing. Operated by three touch controls, this sleek lamp allows you to turn the light on/off, dim the light smoothly, and change the color setting. Streamline your color-critical workflow with the V70, the perfect addition to the modern image maker's office.



## FEATURES

- High CRI ( $\geq 90$ )
- Full Spectrum Quality Light
- Color Temperature Range (4 Color Settings: Warm 3000K, Middle Warm 4000K, D50 Daylight 5000K, D65 Daylight 6500K)
- Continuous Dimming 100%-20%
- Intuitive 3-Zone Touch Control
- Does Not Emit UV Radiation
- AC/DC Power, Cool to Touch
- Compatible With Fiilex Accessories

## SPECTRAL DATA

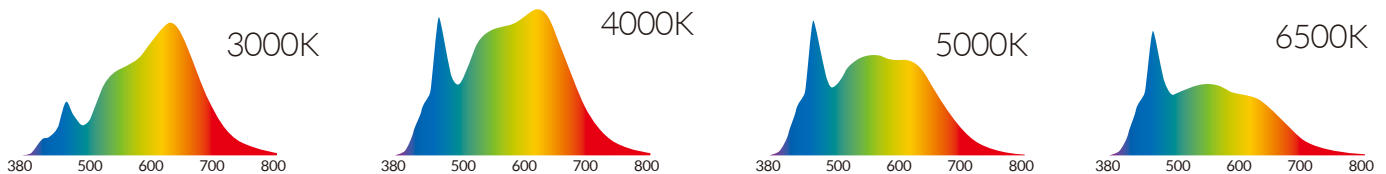


CRI Measurement*	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	CRI Ra**	CRI Extended**
3000K	97	97	94	96	95	95	97	92	74	86	93	79	95	95	93	95	92
4000K	97	99	98	93	94	96	95	92	76	91	91	76	96	98	94	95	92
5000K	96	98	98	90	93	95	93	90	73	92	89	73	96	99	92	94	91
6500K	95	98	97	89	92	95	92	89	70	93	88	76	95	99	91	93	91

\*Values in this table are typical.

\*\*CRI Ra is the averaged result of R1 to R8, CRI Extended is the averaged value of R1 to R15.

## PHOTOMETRIC DATA

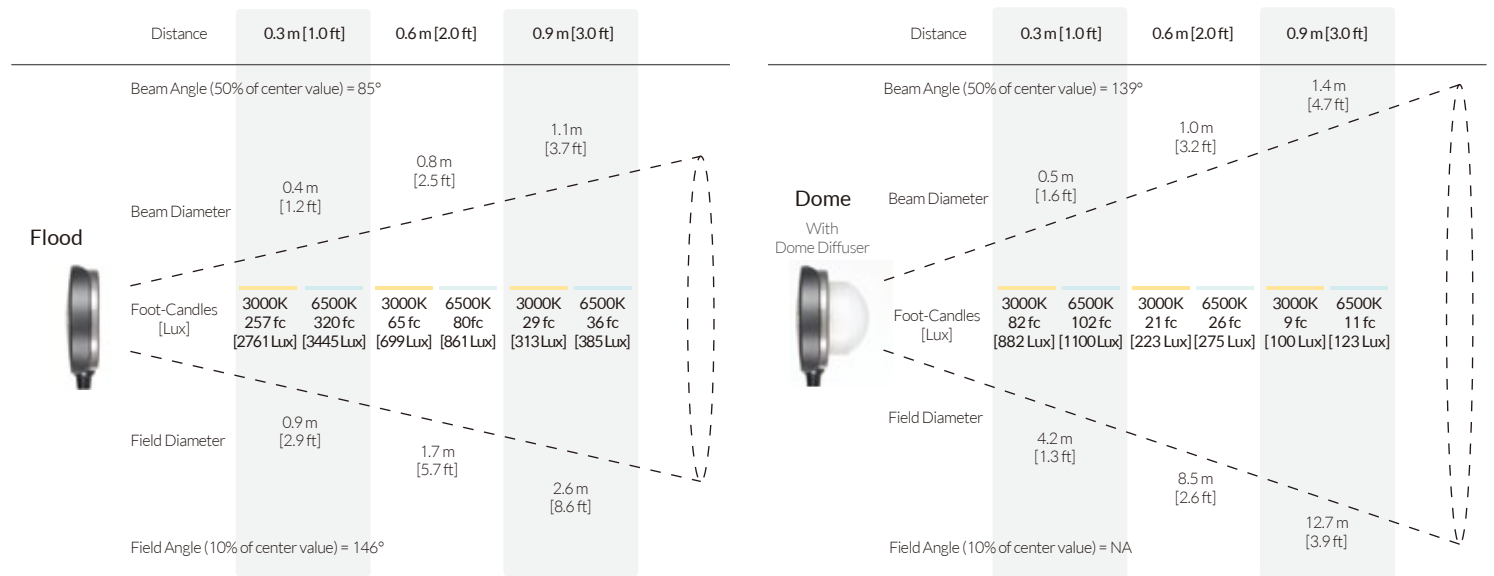

## SPECIFICATIONS

Size	6.8" (Width) x 27.2" (Height)
Weight	2.76 lbs / 1.25 kg
LED	Dense Matrix LED
Thermal Design	Passive Cooling
CCT Range	3000K / 4000K / 5000K / 6500K
Dimming	Continuous Between 100%-20%
CRI	≥90
Power Consumption	11-13W Max
Power Input	12-28V DC ±5%
AC Adapter	100-240V AC, 50 - 60Hz (Input) / 24 VDC, 1A, 24 W (Output)
Operating Temperature	32° - 104°F / 0 - 40° C

## OPTIONS

Multiple accessories are available for the V70.



Dome Diffuser



Fresnel Lens



Gel Holder

Visit [www.fiilex.com](http://www.fiilex.com) for more info.

