

FL5200 LED Fiberoptic Illuminator No Twinkle Wheel

PART NUMBER

FL5200	—	MW	—	30	—	H	—	NT
		Device Color		Fiber Port Size		Homogenizer		Twinkle Wheel
		MW Mixed RGBW		30 30mm		H With homogenizer		NT No Twinkle Wheel TW With Twinkle Wheel

SPECIFICATIONS

FEATURES

UL Listed
Stand-alone operable
Manual, 0-10V and DMX controllable
Mixed Color

ELECTRICAL

Input Voltage: 100V-240V AC
Power Consumption: 120W Max

OPERATING ENVIRONMENT


Ingress Protection: IP20
Exposure: Dry location
Operating Temperature: 0° to 40°C
Storage Temperature: -40° to 70°C
Airflow: 36 cfm
Acoustic Noise: 31 dBA

MECHANICAL

Material/Finish: Black iron plate
Weight: 8.4 lbs
Dimensions: 11.8" x 5.3" x 4.3"
AC input connector: IEC 60320 C14

MOUNTING

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

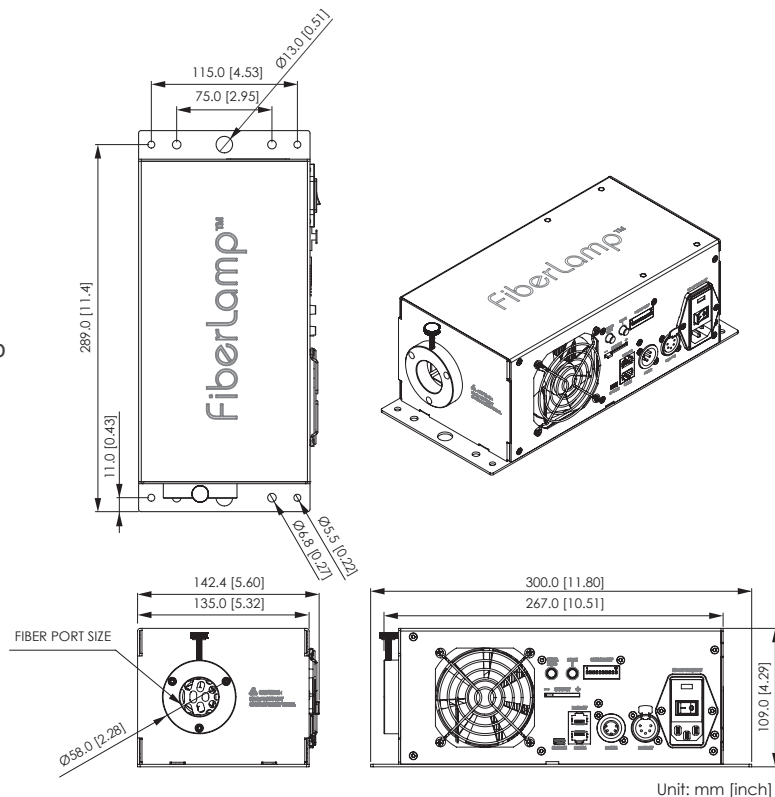

Unit: mm [inch]

061825A

FiberLamp
www.FiberLamp.com

1689 Regatta Blvd, Richmond, CA 94804

t 510.620.5155

fiilex@fiilex.com