

# FL5200 LED Fiberoptic Illuminator With Twinkle Wheel

## PART NUMBER

<b>FL5200</b>	—	<b>MW</b>	—	<b>30</b>	—	<b>H</b>	—	<b>TW</b>
		Device Color		Fiber Port Size		Homogenizer		Twinkle Wheel
		<b>MW</b> Mixed RGBW		<b>30</b> 30mm		<b>H</b> With homogenizer		<b>NT</b> No Twinkle Wheel <b>TW</b> With Twinkle Wheel

## SPECIFICATIONS

### FEATURES

UL Listed  
Stand-alone operable  
Manual, 0-10V and DMX controllable  
Mixed Color

### ELECTRICAL

Input Voltage: 100V-240V AC  
Power Consumption: 120W Max

### OPERATING ENVIRONMENT


Ingress Protection: IP20  
Exposure: Dry location  
Operating Temperature: 0° to 40°C  
Storage Temperature: -40° to 70°C  
Airflow: 36 cfm  
Acoustic Noise: 31 dBA

### MECHANICAL

Material/Finish: Black iron plate  
Weight: 8.4 lbs  
Dimensions: 11.8" x 5.3" x 4.3"  
AC input connector: IEC 60320 C14

### MOUNTING

OK to mount in any orientation  
Best orientation is with exhaust vent facing up  
Keep vents free from obstruction

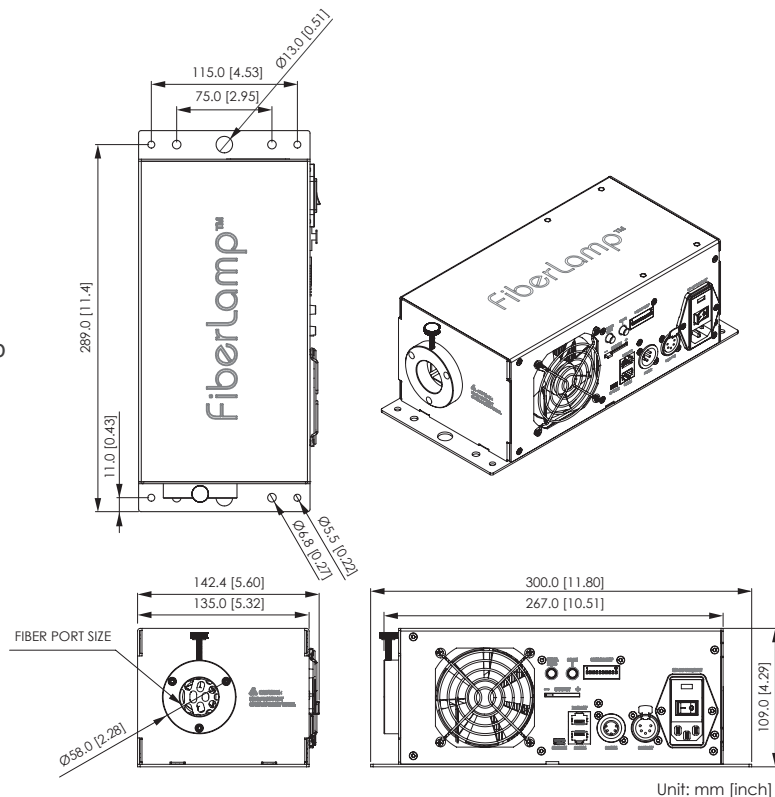

061825A