

Fiilex

P360S

User Guide


Safety Instructions

- DO NOT look into the light source. Be cautious of the high-intensity beam.
- DO NOT disassemble P360S. This will void the warranty.
- DO NOT install P360S in damp or wet locations.
- DO NOT obstruct the fixture's air vents.
- Use safety cable (not included) when rigging P360S overhead.
- Only use Fiilex approved power supply and accessories. Failure to do so may damage the fixture.

Mode Selection

Intensity	Turn the Intensity Knob (13) to adjust brightness.
CCT	Turn the CCT Knob (7) to adjust color temperature.
HUE (Magenta/Green)	Double click the HUE Knob (7) to adjust HUE value.
DMX Control	Double click the DMX Knob (13) to set DMX address (Range: 1 - 510).

Parts Diagram

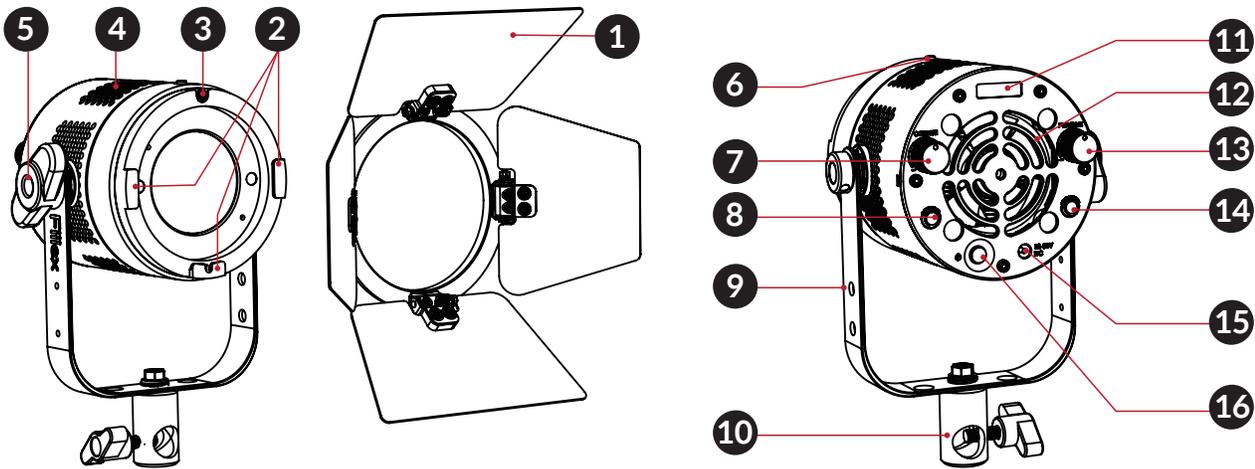

- | | | | |
|--------------------|-----------------------------|-------------------------|-------------------------------|
| 1. 4-leaf Barndoor | 5. Yoke Knobs | 9. Yoke | 13. Intensity / DMX Knob |
| 2. Barndoor Slot | 6. Accessory Lock Release | 10. Light Stand Adapter | 14. Light Control Output Jack |
| 3. Accessory Lock | 7. CCT/HUE Knob | 11. OLED Display | 15. DC Power Input Jack |
| 4. Side Vents | 8. Light Control Input Jack | 12. Rear Vents | 16. ON/OFF Button |

210202A