

PROJECT

QUANTITY

P1L Mini Leko Light (Track)

40W LED/ 19° / 26° / 36° / 50°

ORDERING GUIDE

FLXP1L - - - - - PSP -

Beam Angle

19 19°
26 26°
36 36°
50 50°

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

TOX w/ O-type DMX Track Adapter
TEX w/ E-type DMX Track Adapter (Legacy product)

Power Supply & Control

PSP Power Supply w/ Pass-Through DMX

Plug/Connection

US US 120V
EU EU 220V

SPECIFICATIONS


Beam Angle	19° / 26° / 36° / 50°
CRI / TLCI	95/90 typical (in CCT Mode of 2800K-6500K)
Dimming	100% - 0% flicker free
AC Power Draw	40W max
AC Input	100 - 240V AC, 50 - 60Hz
Control	Manual, DMX512
Cooling	Passive Cooling
Acoustic Noise	0 dBA (none)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	6.2lb / 2.8kg
Gobo Size	Diameter: E Size (37.5mm)
	Max Image: 28mm
	Max Thickness: 0.8mm

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 40W Power Draw
- Four Shutters for Precise Framing


MECHANICAL FIGURES

PSP

US

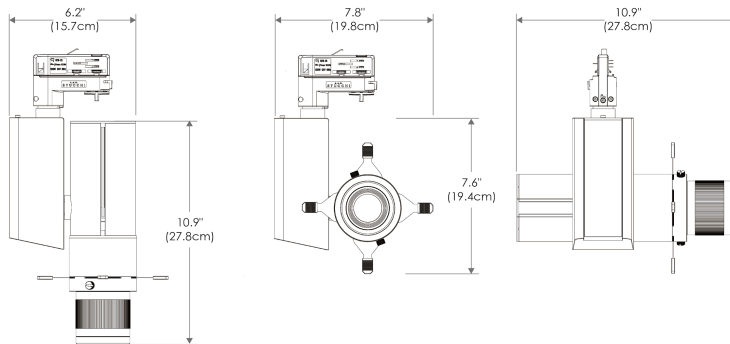


TILT/ROTATION

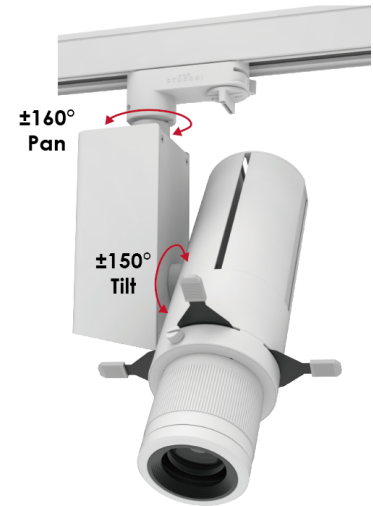


PSP

EU

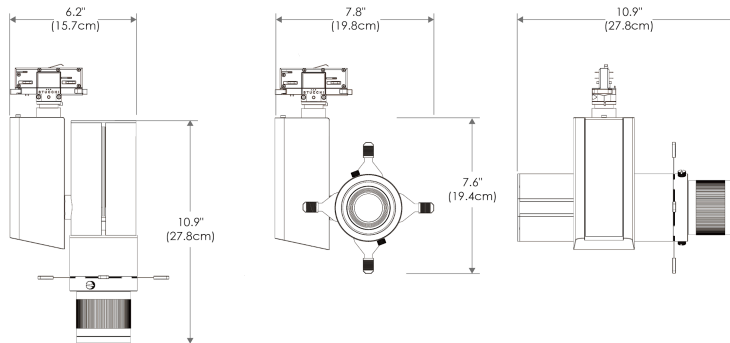

PHOTOMETRIC DATA

50 Degree



Distance		3' (~0.9 m)	5' (~1.5 m)	10' (~3.0 m)
@3200K	fc	159	76	12
	lux	1716	823	128
@5600K	fc	149	71	11
	lux	1605	769	120
Beam Diameter		Ø 2.4' (~0.7m)	Ø 4.1' (~1.2m)	Ø 8.2' (~2.5m)

