

PROJECT

QUANTITY

P1X Spot Light (Clamp)

40W LED/ 60°



FLXP1X-CLR-BK-CLP-PSV-US



FLXP1X-CLR-WH-CLP-PST-US



FLXP1X-CLR-BK-MPT-PSM-US

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 40W Power Draw

ORDERING GUIDE

FLXP1X - - - - -

Mode

CLR	All Modes
EZ	All EZ Modes
RGB	RGB Mode Only
CCT	Tunable CCT Mode Only
3200	Fixed 3200K
5600	Fixed 5600K

Finish

WH	White
BK	Black

Mount

CLP	Clamp
MPT	Monopoint

Power Supply

PSV	Side Mount Power Supply (CLP Only)
PST	Top Mount Power Supply (CLP Only)
PSM	Monopoint Power Supply (MPT Only)

Plug/Connection


US	US 120V
EU	EU 220V

SPECIFICATIONS

Beam Angle	60°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	40W max
AC Input	100 - 240V AC, 50 - 60Hz
Control	Manual, DMX512
Cooling	Passive Cooling
Acoustic Noise	0 dBA (none)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	PSV: 4.4lb / 2.0kg PST: 4.0lb / 1.8kg PSM: 4.0lb / 1.8kg
DMX Input	XLR5 Male and Female via TRRS Adapter (Included)

MECHANICAL FIGURES


PSV

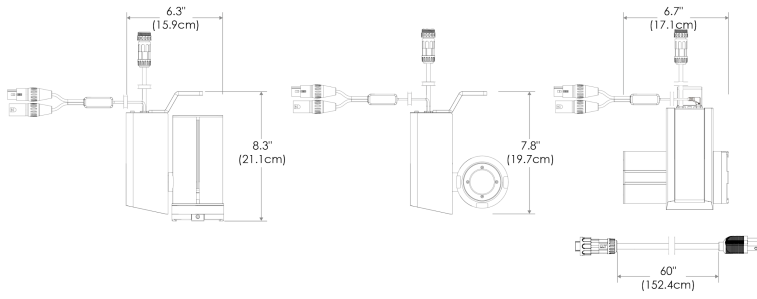

TILT/ROTATION




PST

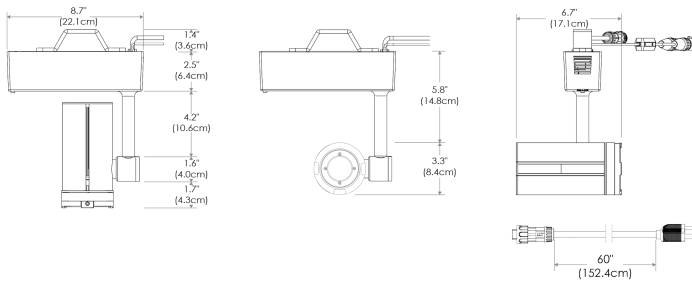

*All -CLP configuration models come with standard AC cables of 5'.

PSM

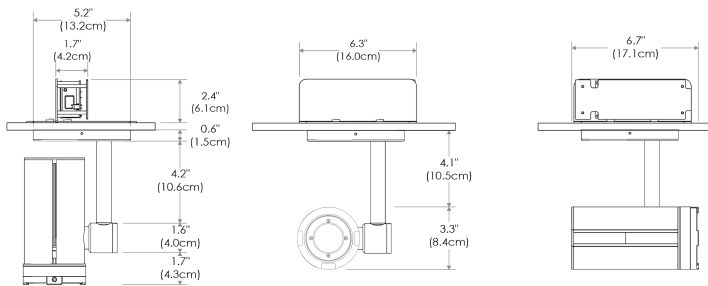

ACCESSORIES



4 Leaf Barn Door
FLXP1X-BD4-WH/BK