

PROJECT		QUANTITY	
---------	--	----------	--

P3L Ellipsoidal Light (Track)

90W LED/ 19° / 26° / 36° / 50°



ORDERING GUIDE

FLXP3L - - - - - **PSP** -

Beam Angle					
19	19°				
26	26°				
36	36°				
50	50°				
Mode					
CLR	All Modes				
EZ	All EZ Modes				
RGB	RGB Mode Only				
CCT	Tunable CCT Mode Only				
3200	Fixed 3200K				
5600	Fixed 5600K				
Finish					
WH	White				
BK	Black				
Mount					
TOX	w/ O-type DMX Track Adapter				
TEX	w/ E-type DMX Track Adapter (Legacy product)				
Power Supply & Control					
PSP	Power Supply w/ Pass-Through DMX				
Plug/Connection					
US	US 120V				
EU	EU 220V				

SPECIFICATIONS


Beam Angle	19° / 26° / 36° / 50°
CRI / TLCI	95/90 typical (in CCT Mode of 2800K-6500K)
Dimming	100% - 0% flicker free
AC Power Draw	90W max
AC Input	100 - 240V AC, 50 - 60Hz
Remote Control	DMX 512
Cooling	Fan Cooled
Acoustic Noise	19 dBA (Auto Mode)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	7.3lb / 3.3kg
Gobo Size	Diameter: M Size (66mm)
	Max Image: 48mm
	Max Thickness: 1mm

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Carries Four Shutter Blades

MECHANICAL FIGURES


PSP

US

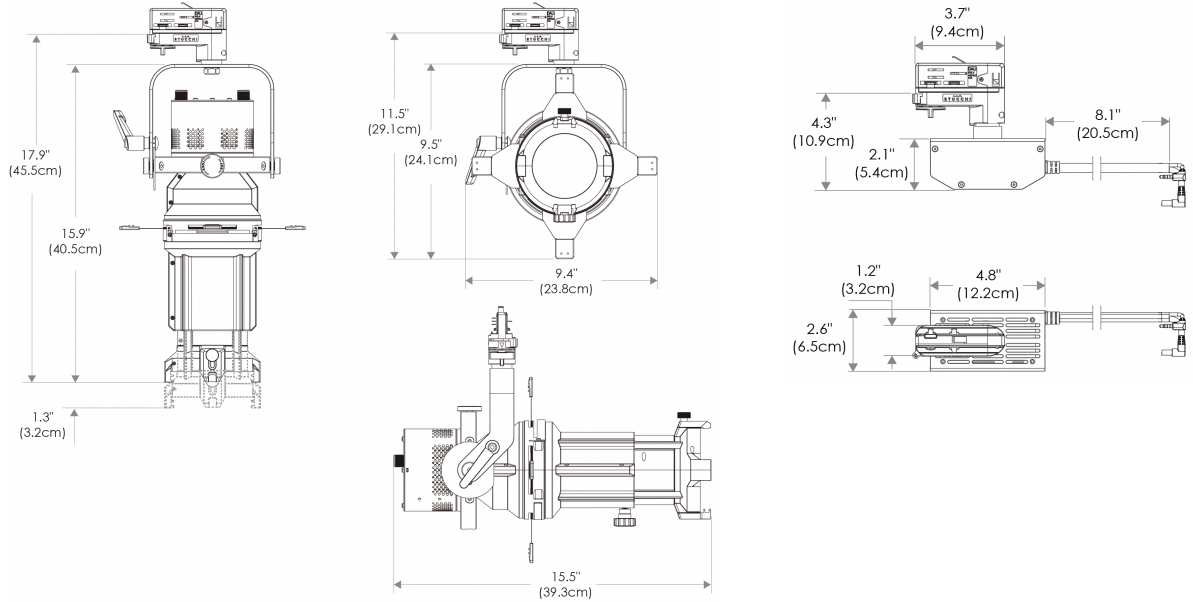


PSP

EU

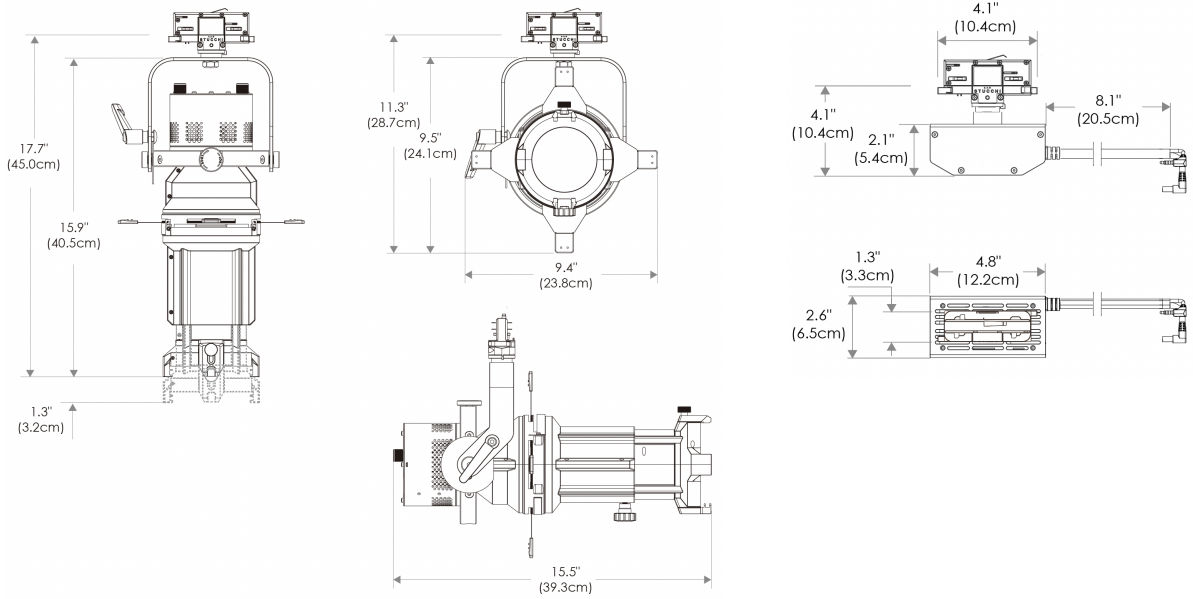


TILT/ROTATION

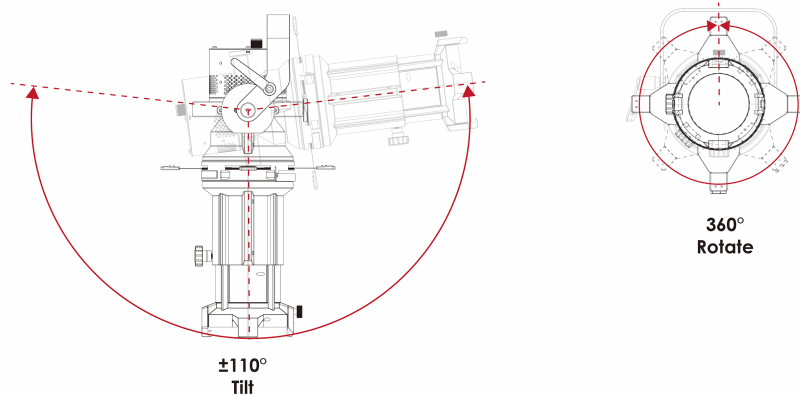


PHOTOMETRIC DATA


19 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	2202	174	83
	lux	23702	1873	894
@5600K	fc	2239	177	84
	lux	24101	1906	905
Beam Diameter		Ø 0.9' (~0.3m)	Ø 3.0' (~0.9m)	Ø 4.6' (~1.4m)

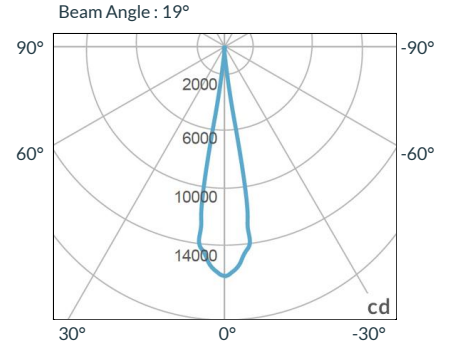


26 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	1978	160	77
	lux	21292	1726	831
@5600K	fc	2079	169	81
	lux	22379	1814	873
Beam Diameter		Ø 1.2' (~0.4m)	Ø 4.0' (~1.2m)	Ø 5.9' (~1.8m)

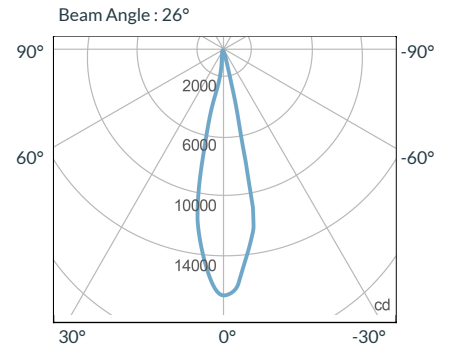


36 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	743	60	29
	lux	7998	646	313
@5600K	fc	820	67	32
	lux	8827	722	345
Beam Diameter		Ø 1.7' (~0.5m)	Ø 5.6' (~1.7m)	Ø 8.2' (~2.5m)

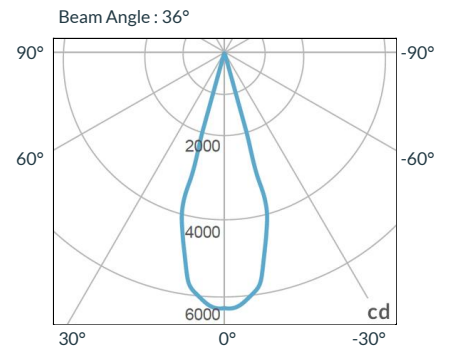

50 Degree



Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	269	22	11
	lux	2896	237	119
@5600K	fc	285	23	11
	lux	3068	248	119
Beam Diameter		Ø 2.3' (~0.7m)	Ø 7.7' (~2.4m)	Ø 11.7' (~3.6m)

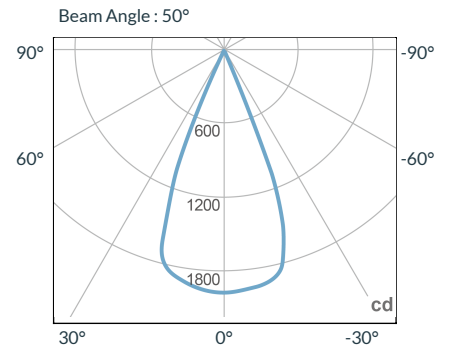


ACCESSORIES

(specify finish by adding -BK or -WH)



Leko Gobo Holder
FLXP3L-GOBOHOLDER



Leko Gobo Set of 4
FLXP3L-GOBOSET



Leko Iris
FLXP3L-IRIS



Leko Gel Holder
FLXP3L-GELHOLDER



DMX 6 Channel Controller
FLXCNTL-DMX6