


P9L Ellipsoidal Light (Clamp)

400W LED/ 19° / 36°

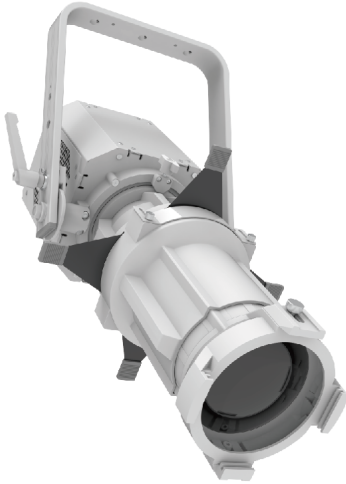

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 400W Power Draw
- Carries Four Shutter Blades

ORDERING GUIDE

FLXP9L - - - **CLP** - **PS** -

Beam Angle

19 19°
36 36°

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

CLP Clamp Mount

Power Supply

PS Internal Power Supply

Plug/Connection

US US 120V
EU EU 220V


SPECIFICATIONS

Beam Angle	19° / 36°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	400W max
AC Input	100 - 240V AC, 50 - 60Hz
DC Input	48V DC (via XLR-3)
Control	Manual, DMX512
Cooling	Fan Cooled
Acoustic Noise	23 dBA (Auto Mode)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	26.2 lbs / 11.9 kg (With 19° lens tube)
Gobo Size	Diameter: B Size (86mm)
	Max Image: 64.5mm
	Max Thickness: 1mm
Approved Regulatory Standards	cETLus, FCC, CE, UKCA, RoHS, WEEE

MECHANICAL FIGURES

PS

US

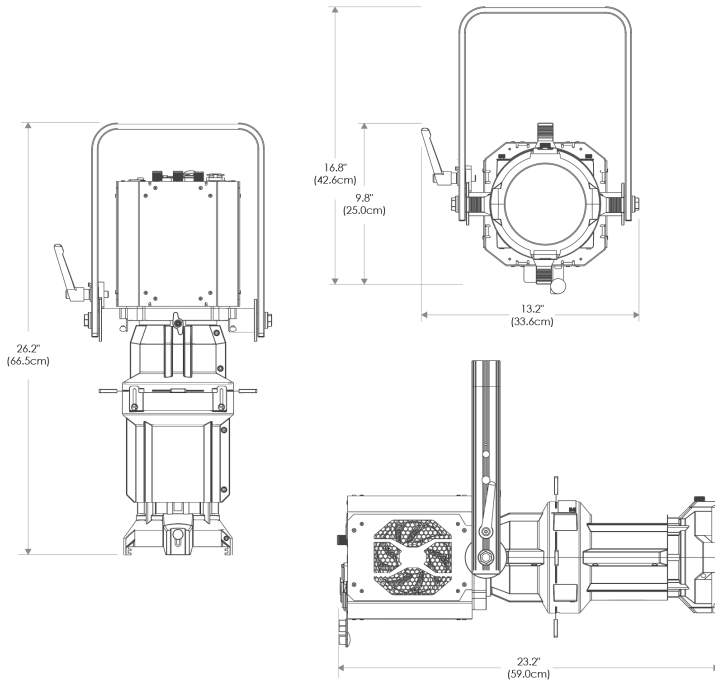

TILT/ROTATION




PHOTOMETRIC DATA

19 Degree

Distance		6.6' (~2.0 m)	10.0' (~3.0 m)	32.8' (~10.0 m)
@3200K	fc	2880	1096	107
	lux	31000	11800	1151
@5600K	fc	2666	1013	99
	lux	28700	10900	1065
Beam Diameter		Ø 1.9' (~0.6m)	Ø 2.9' (~0.9m)	Ø 9.7' (~3.0m)

36 Degree



Distance		6.6' (~2.0 m)	10.0' (~3.0 m)	32.8' (~10.0 m)
@3200K	fc	690	270	26
	lux	7430	2910	280
@5600K	fc	634	252	24
	lux	6820	2710	258
Beam Diameter		Ø 3.6' (~1.1m)	Ø 5.5' (~1.7m)	Ø 18.0' (~5.5m)

MODE DESCRIPTION

Mode Description	Available Modes
- CLR	All Modes (8 bit and 16 bit)
- EZ	All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K)
- RGB	EZ RGB (8 bit)
- CCT	EZ CCT (8 bit)
- 3200	EZ 3200K (8 bit)
- 5600	EZ 5600K (8 bit)

See Downloads portion of webpage for full DMX profiles

COMPATIBLE ACCESSORIES

(specify finish by adding -BK or -WH)



15' Safety Cable
FLXSAFETYCABLE



Studio Remote Patcher Utility
CXRPU



Leko Lens Tube
19deg
FLXP9L-LEKO19



Leko Lens Tube
36deg
FLXP9L-LEKO36



Leko Gobo Holder
FLXP9L-
GOBOHOLDER



Leko Gobo Set of 4
FLXP9L-GOBOSET



Leko Iris
FLXP9L-IRIS



Leko Gel Holder
FLXP9L-
GELHOLDER



0-10V to DMX Converter
KSUSCB1



DMX 6 Channel Controller
FLXCNTL-DMX6



DALI to DMX Converter
KSUSCB2