

P1L Mini Leko Light (Track)

40W LED/ 19° / 36° / 50°



FLXP1L50-CLR-BK-TOX-PSP-US



FLXP1L50-CLR-WH-TOX-PST-US

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 40W Power Draw
- Four Shutters for Precise Framing

ORDERING GUIDE

FLXP1L - - - TOX - -

Beam Angle

19 19°
36 36°
50 50°

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

TOX w/ O-type DMX Track Adapter

*Custom Track Adaptors Available

Power Supply & Control

PSP Power Supply Side Mount w/ Pass-Through DMX
PST Power Supply Top Mount w/ Pass-Through DMX

Plug/Connection


US US 120V
EU EU 220V

SPECIFICATIONS


Beam Angle	19° / 36° / 50°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	40W max
AC Input	100 - 240V AC, 50 - 60Hz
Control	Manual, DMX512
Cooling	Passive Cooling
Acoustic Noise	0 dBA (none)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	PSP: 6.2lb / 2.8kg PST: 5.8lb / 2.6kg
Gobo Size	Diameter: E Size (37.5mm) Max Image: 28mm
Gobo Holder	Max Thickness: 0.3-1.2mm (Steel) Max Thickness: 1.0-2.0mm (Glass)
Approved Regulatory Standards	cETLus, FCC, CE, UKCA, RoHS, WEEE

MECHANICAL FIGURES


PSP 

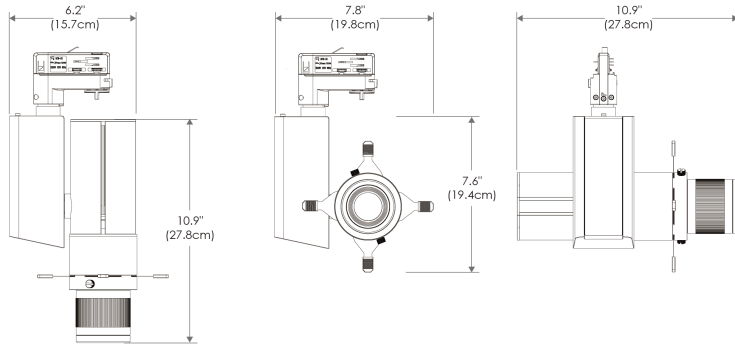


PSP 

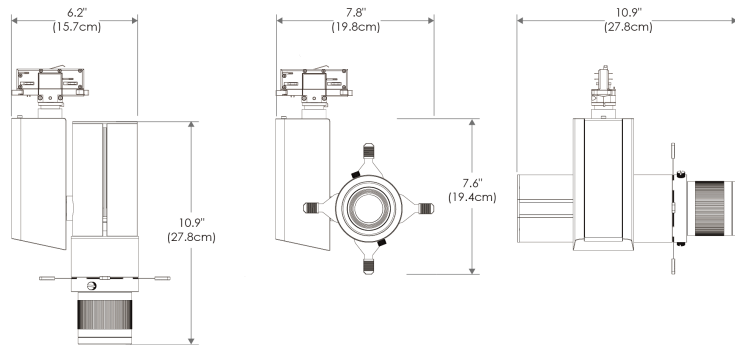

PST

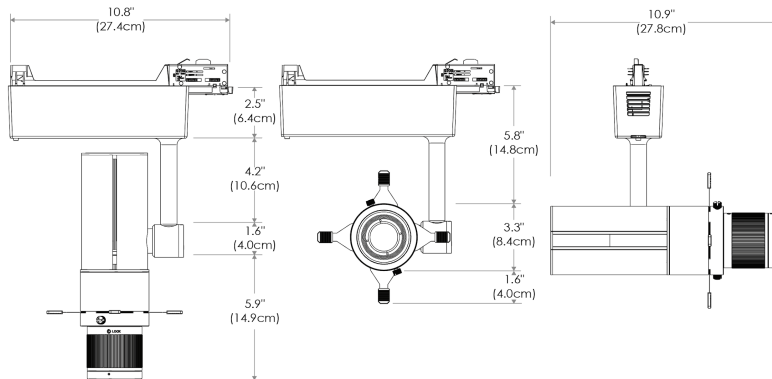


TILT/ROTATION

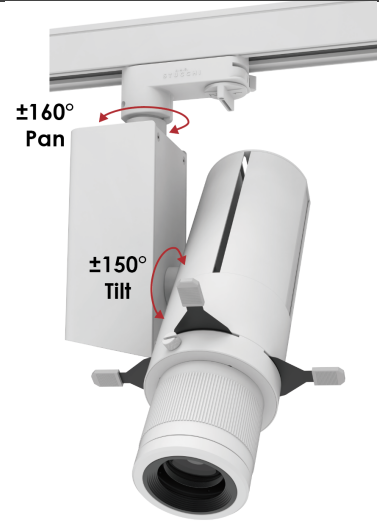


* Tilt/rotation applies to all options.

PHOTOMETRIC DATA


19 Degree




Distance		3' (~0.9 m)	5' (~1.5 m)	10' (~3.0 m)
@3200K	fc	1030	529	99
	lux	11086	5696	1069
@5600K	fc	1007	515	95
	lux	10841	5543	1019
Beam Diameter		Ø 0.9' (~0.3m)	Ø 1.5' (~0.5m)	Ø 3.0' (~0.9m)

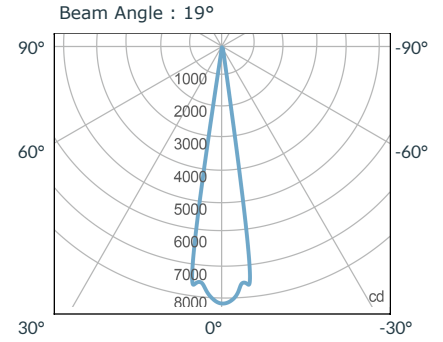


36 Degree




Distance		3' (~0.9 m)	5' (~1.5 m)	10' (~3.0 m)
@3200K	fc	293	152	29
	lux	3155	1633	315
@5600K	fc	280	145	28
	lux	3011	1557	299
Beam Diameter		Ø 1.8' (~0.5m)	Ø 2.9' (~0.9m)	Ø 5.9' (~1.8m)

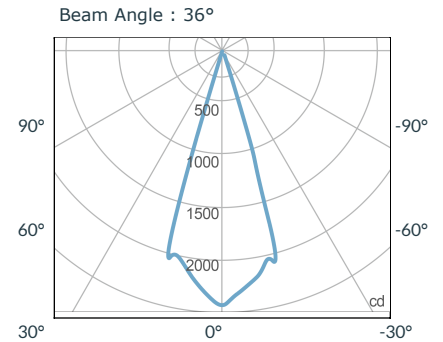

50 Degree



Distance		3' (~0.9 m)	5' (~1.5 m)	10' (~3.0 m)
@3200K	fc	153	79	16
	lux	1647	854	167
@5600K	fc	146	75	15
	lux	1569	811	159
Beam Diameter		Ø 2.4' (~0.7m)	Ø 4.0' (~1.2m)	Ø 8.0' (~2.5m)

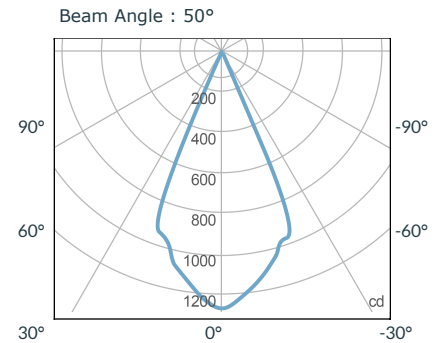

COMPATIBLE ACCESSORIES

(specify finish by adding -BK or -WH)



15' Safety Cable
FLXSAFETYCABLE



Studio Remote Patcher Utility
CXRPJ



Mini Leko Steel Gobo Holder
FLXP1L-GOBOHOLDER



Mini Leko Glass Gobo Holder
FLXP1L-GLASSGOBOHOLDER



DMX 6 Channel Controller
FLXCNTL-DMX6



0-10V to DMX Converter
KSUSCB1



DALI to DMX Converter
KSUSCB2