

P1X Spot Light (Clamp)

40W LED/ 60°



FLXP1X-CLR-BK-CLP-PSV-US



FLXP1X-CLR-WH-CLP-PST-US



FLXP1X-CLR-BK-MPT-PSM-US

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 40W Power Draw

ORDERING GUIDE

FLXP1X - - - - -

Mode

CLR	All Modes
EZ	All EZ Modes
RGB	RGB Mode Only
CCT	Tunable CCT Mode Only
3200	Fixed 3200K
5600	Fixed 5600K

Finish

WH	White
BK	Black

Mount

CLP	Clamp
MPT	Monopoint

Power Supply

PSV	Side Mount Power Supply (CLP Only)
PST	Top Mount Power Supply (CLP Only)
PSM	Monopoint Power Supply (MPT Only)

Plug/Connection


US	US 120V
EU	EU 220V

SPECIFICATIONS


Beam Angle	60°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	40W max
AC Input	100 - 240V AC, 50 - 60Hz
Control	Manual, DMX512
Cooling	Passive Cooling
Acoustic Noise	0 dBA (none)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	PSV: 4.4lb / 2.0kg PST: 4.0lb / 1.8kg PSM: 4.0lb / 1.8kg
DMX Input	XLR5 Male and Female via TRRS Adapter (Included)
Approved Regulatory Standards	cETLus, FCC, CE, UKCA, RoHS, WEEE

MECHANICAL FIGURES

PSV

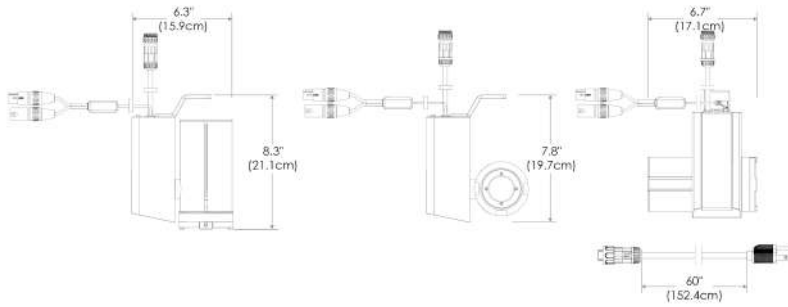


PST

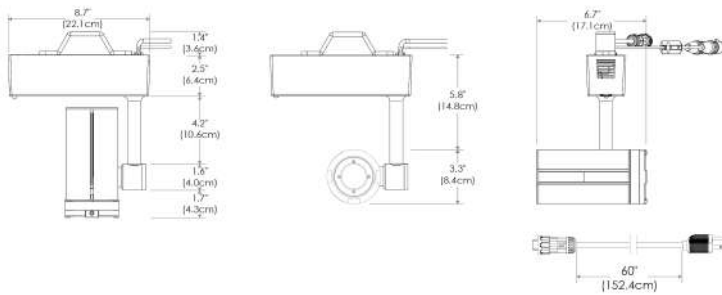


*PSV & PST configuration models come with standard AC cables of 5'.

PSM

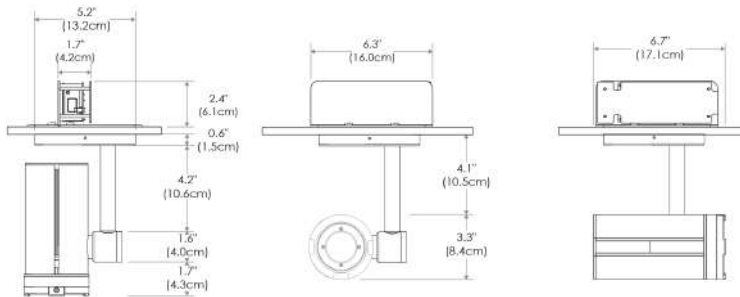

PHOTOMETRIC DATA

60 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	258	25	10
	lux	2773	266	113
@5600K	fc	254	24	10
	lux	2729	261	113
Beam Diameter		Ø 2.7' (~0.8m)	Ø 9.0' (~2.7m)	Ø 13.9' (~4.2m)

TILT/ROTATION



* Tilt/rotation applies to all options.

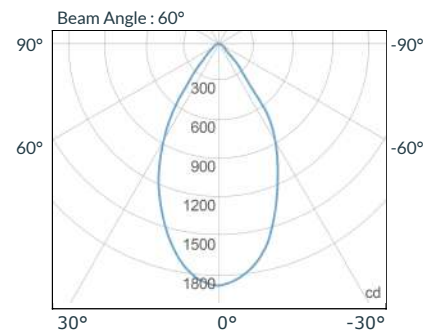

MODE DESCRIPTION

Mode Description	Available Modes
- CLR	All Modes (8 bit and 16 bit)
- EZ	All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K)
- RGB	EZ RGB (8 bit)
- CCT	EZ CCT (8 bit)
- 3200	EZ 3200K (8 bit)
- 5600	EZ 5600K (8 bit)

See Downloads portion of webpage for full DMX profiles

COMPATIBLE ACCESSORIES

(specify finish by adding -BK or -WH)



15' Safety Cable
FLXSAFETYCABLE



2" Diameter Clamp
FLXCLAMP



Studio Remote Patcher Utility
CXIRPU



4 Leaf Barn Door
FLXP1X-BD4



DMX 6 Channel Controller
FLXCNTL-DMX6



0-10V to DMX Converter
KSUSCB1



DALI to DMX Converter
KSUSCB2