PROJECT		QUANTITY	

P3F Fresnel Light (Track)

90W LED/ 15°- 45°

ORDERING GUIDE

FLXP3F - [ ] - [ ] - TOX - PSP - [ ]

Mode

CLR	All Modes
EZ	All EZ Modes
RGB	RGB Mode Only
CCT	Tunable CCT Mode Only
3200	Fixed 3200K
5600	Fixed 5600K

Finish

WH	White
BK	Black

Mount

TOX	w/ O-type DMX Track Adapter

*Custom Track Adaptors Available

Power Supply & Control

PSP	Power Supply w/ Pass-Through DMX

Plug/Connection

US	US 120V
EU	EU 220V

SPECIFICATIONS

Beam Angle	15°- 45°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	90W max
AC Input	100 - 240V AC, 50 - 60Hz
Control	Manual, DMX512
Cooling	Fan Cooled
Acoustic Noise	19 dBA (Auto Mode)
Operating Temp.	32 - 107°F (0 - 41°C)
Weight (Fixture + Power Supply)	4.5lb / 2.0kg
Approved Regulatory Standards	cETLus, FCC, CE, UKCA, RoHS, WEEE

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

1689 Regatta Blvd., Richmond, CA 94804 | (510) 620-5155 | fiilex@fiilex.com

Fiilex®

Rev 102726A

MECHANICAL FIGURES

PSP US

Flood

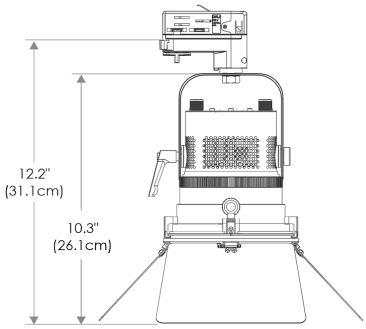

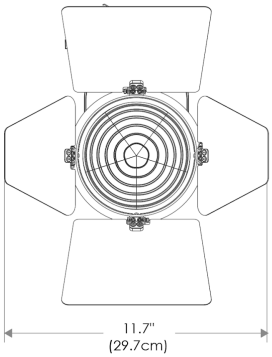

Focus

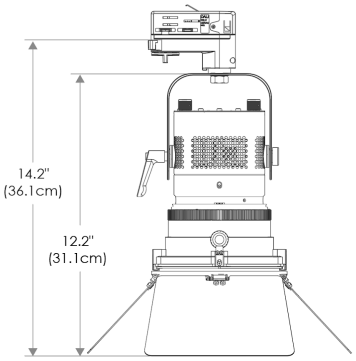

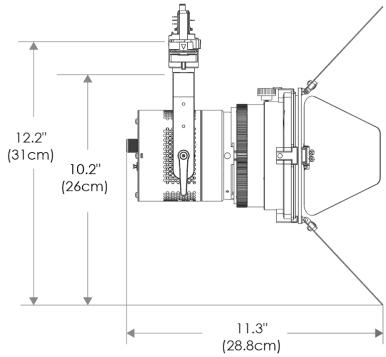

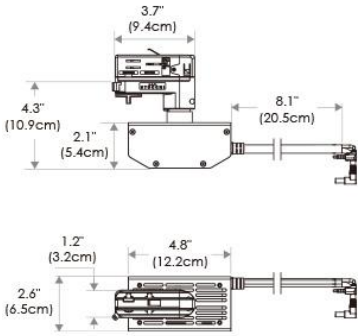

PSP EU

Flood

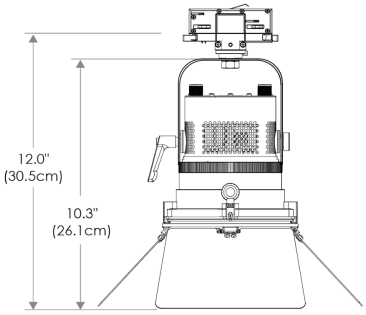

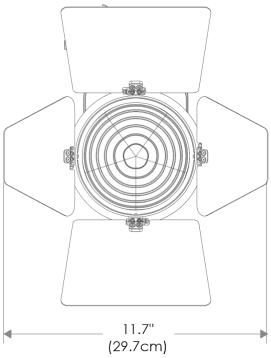

Focus

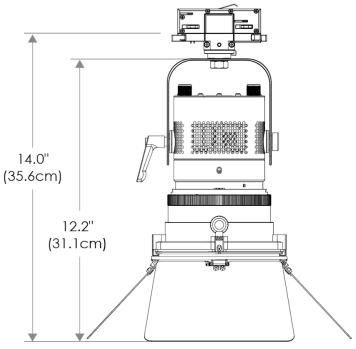

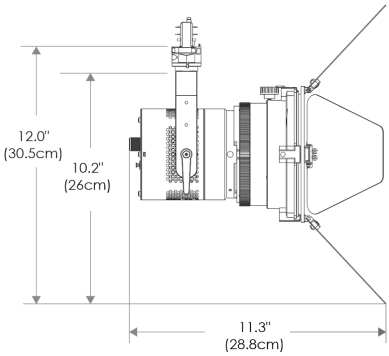

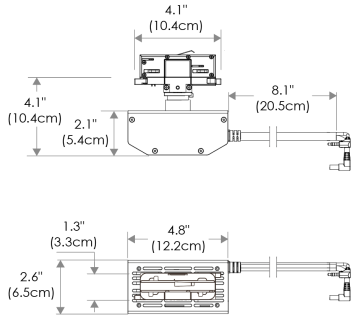

PHOTOMETRIC DATA

Focus

Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	2604	241	117
	lux	28027	2591	1257
@5600K	fc	2690	249	121
	lux	28960	2678	1299
Beam Diameter		Ø 0.8' (~0.2m)	Ø 2.6' (~0.8m)	Ø 4.1' (~1.2m)

Beam Angle : 15°

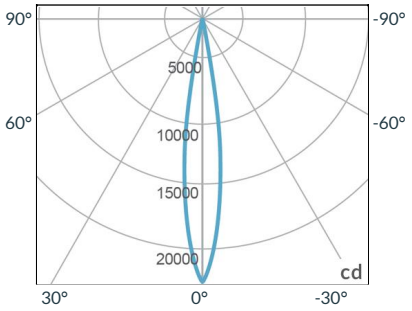

Flood

Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	546	54	29
	lux	5876	578	314
@5600K	fc	564	55	30
	lux	6071	597	324
Beam Diameter		Ø 2.2' (~0.7m)	Ø 7.4' (~2.3m)	Ø 11.4' (~3.5m)

Beam Angle : 45°

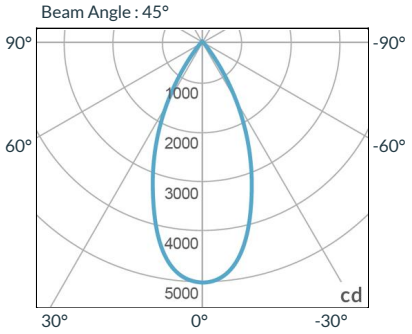

MODE DESCRIPTION

Mode Description	Available Modes
- CLR	All Modes (8 bit and 16 bit)
- EZ	All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K)
- RGB	EZ RGB (8 bit)
- CCT	EZ CCT (8 bit)
- 3200	EZ 3200K (8 bit)
- 5600	EZ 5600K (8 bit)

See Downloads portion of webpage for full DMX profiles

TILT/ROTATION



* Tilt/rotation applies to all options.

COMPATIBLE ACCESSORIES

(specify finish by adding -BK or -WH)

15" Safety Cable
FLXSAFETYCABLE

Studio Remote Patcher Utility
CXRPU

P3F Fresnel Lens 15-45deg
FLXP3F-FRNL1545

P3F Barndoor 4 Leaf
FLXP3F-BD4

DMX 6 Channel Controller
FLXCNTL-DMX6

0-10V to DMX Converter
KSUSCB1

DALI to DMX Converter
KSUSCB2