PROJECT		QUANTITY	

Studio RPU

Studio Remote Patcher Utility

ORDERING GUIDE

CXRPU - ☐

Finish

WH	White
BK	Black

SPECIFICATIONS

Dimensions (L x W x H)	6.0" x 2.2" x 1.1" / 15.2cm x 5.6cm x 2.8cm
Weight	0.42lb / 0.19kg
DC Voltage	USB Type-C Port (5V/1A Power)
IP Rating	IP-X4
DMX Output Speeds	20 - 44 Hz (User Selectable)
DMX / RDM Port	TRRS Port (XLR-5 via adapter)
Mount	1/4" - 20 / Magnets (Wall Mount) / Lanyard
Updates	via Wi-Fi / USB-C

MECHANICAL FIGURE

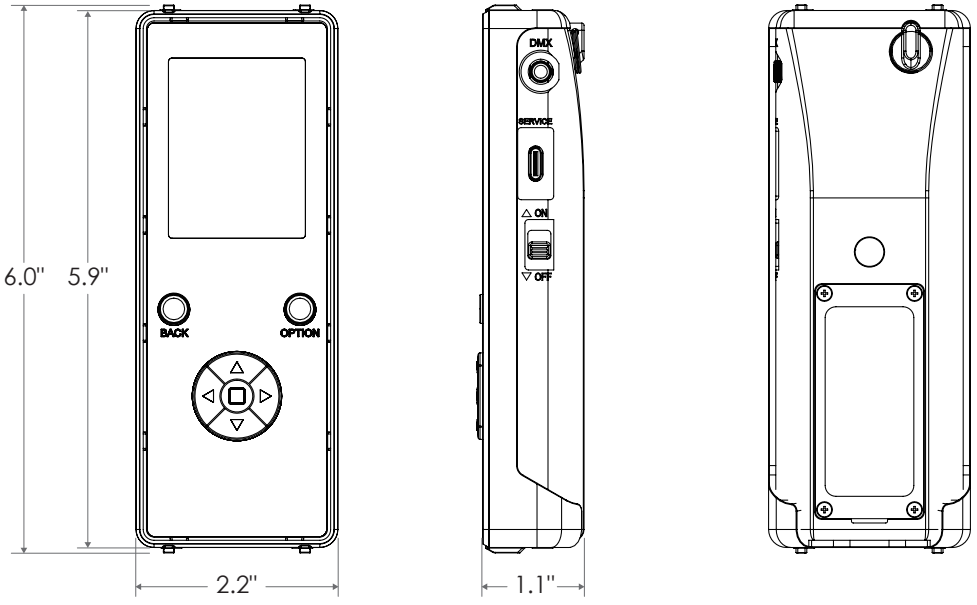

INSTALLATION INFO

Power
Requires a hardline power connection provide via USB Type-C.

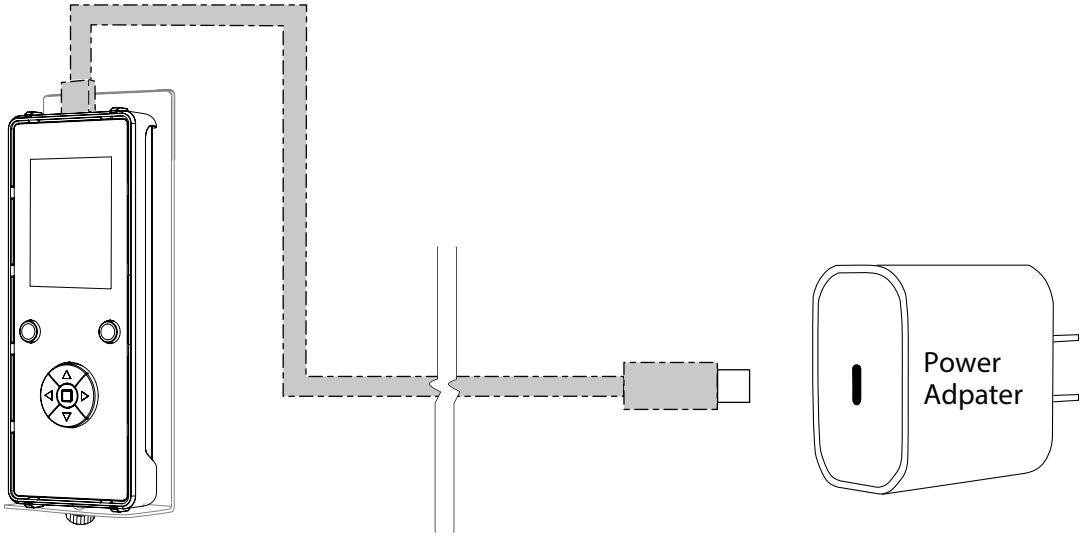

Battery Installation
Unscrew the 4x screws (M2 Phillips screw) and remove the cover, insert 2x AAA batteries,
then reverse the steps to secure it. The studio RPU can now operate for up to 30 minutes on mobile use.

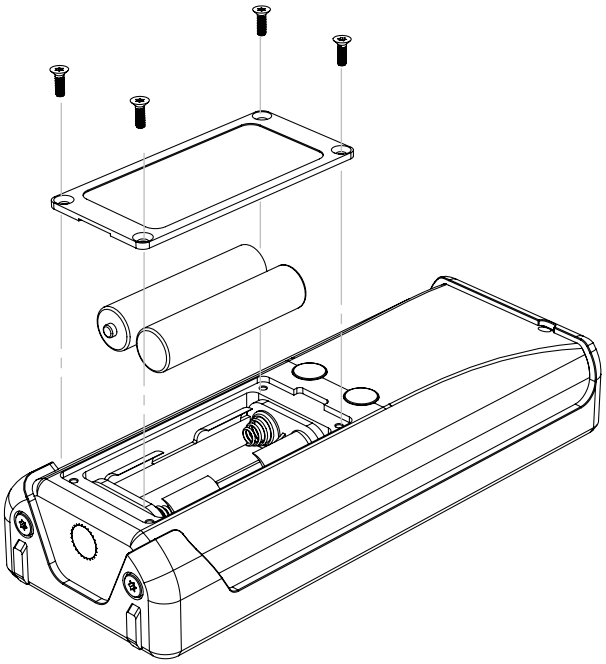

***Note: Battery packs are not included. They are for short-term mobile use only; do not leave batteries installed permanently.**